


SOLAR GUARDIAN FLOODLIGHT

270mm x 220mm

- Lo último en Ahorro Energético Solar
- Sensor PIR para iluminar sólo cuando sea necesario
- Ideal para zonas donde no llega el suministro eléctrico
- Peso reducido y sencilla instalación

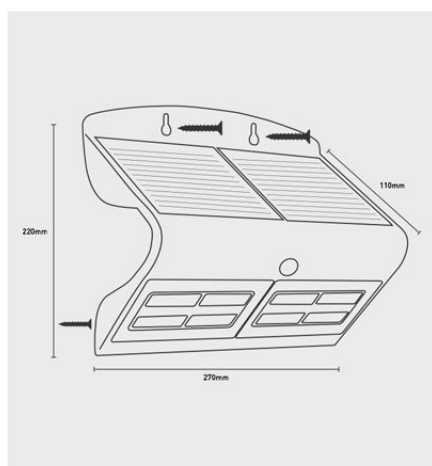

CAT NO.	TEMPERATURA DE COLOR	LUMINARIA LUMENS
LEXS80W40	4000K	800
LEXS80B40	4000K	800

LUCECO

Esta luminaria es compatible con bombillas de las clases energéticas:

A++
A+
A
B
C
D
E

874/2012

NORMATIVA

EN 60598-1	Luminaires - General requirements
EN 60598-2-2	Luminaires - Recessed
EN 60598-2-22	Luminaires - Emergency
EN 61347-1	Lamp controlgear - Part 1: General and safety requirements
EN 61347-2-13	Lamp controlgear - Part 2-13 : Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547	Equipment for general lighting purposes - EMC immunity requirements
EN 61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - for harmonic current emissions
EN 62471	Photobiological safety of lamps and lamp systems
2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)

